


# PHILIPS


## Coreline Downlight

DN140B

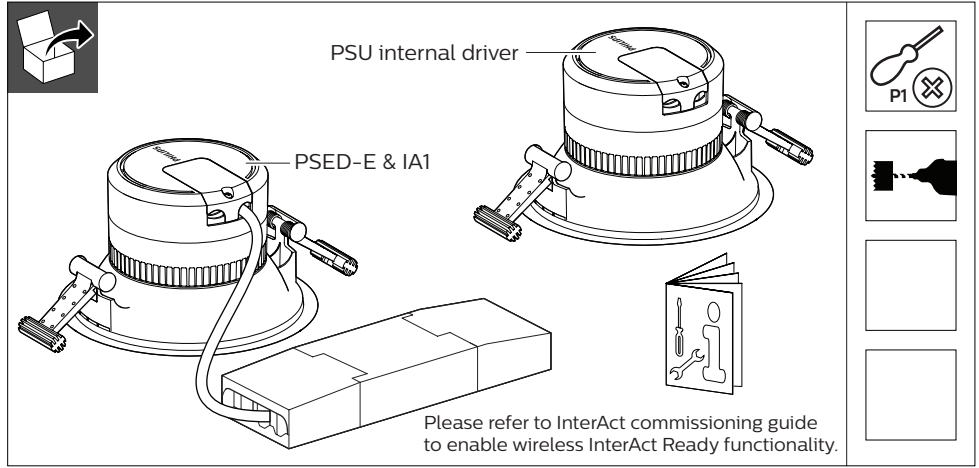

	System lumen (lm)	CCT (K)	Driver	Pnom (W)	Pmax (W)	Ø mm	Dimensions in mm		kg
							ØA	B	
DN140B	LED10S	1100	PSU	9.5	10.5	150 - 155	162	98	0.42
	LED20S	2200		19.0	20.9	200 - 205	216	106	0.66
	LED10S	1100	PSED-E IA1	11.5	12.7	150 - 155	162	98	0.60
	LED20S	2200		20.5	22.6	200 - 205	216	106	0.84

- The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
  - The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
  - Clean with dry cloth.
- ATTENTION**  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES

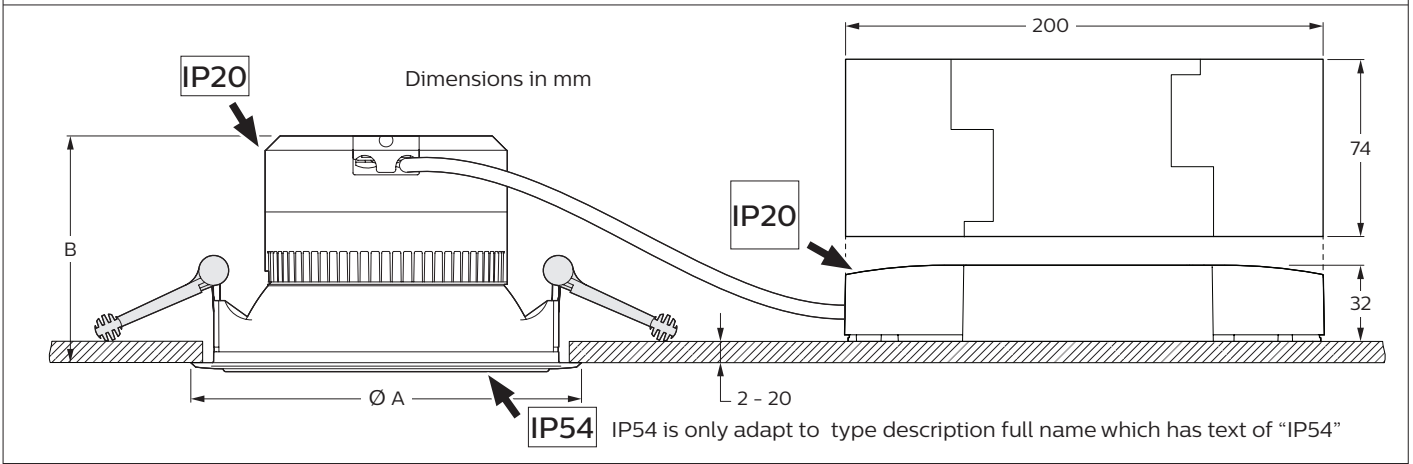

**Inrush current**

	PSU 1100lm	PSU 2200lm	PSED-E 1100lm	PSED-E 2200lm	IA1 2200lm
Electrical characteristics					
Inom (A)	0.05	0.09	0.06	0.10	0.11
Imax (A)	2.20	2.20	20.40	20.40	12.00
Tref (µs)	45	45	195	195	250
MCB No. of driver max.					
B-10 A	30	30	15	15	15
B-13 A	39	39	19	19	19
B-16 A	48	48	24	24	24
C-10 A	50	50	25	25	25
C-13 A	65	65	32	32	32
C-16 A	80	80	40	40	40

