

WADI-PL


Material: PA 6
 Farbe: grau/schwarz
 Dichteinsatz: CR
 Einsatztemperatur: -40 °C bis 100 °C
 Schutzart: IP 68

Material: PA 6
 Colour: grey/black
 Sealing insert: CR
 Temperature range: -40 °C to 100 °C
 Protection type: IP 68

178.SK
178.SL



Gewinde Entry Thread G			H mm	GL mm	grau/grey RAL 7035 HUGRO No.	schwarz/black RAL 9005 HUGRO No.
kurzes Anschlussgewinde / short entry thread						
M 12 x 1,5	1,5 - 5	15	24	8	178.1505.SKG	178.1505.SKS
	2,5 - 6,5				178.1507.SKG	178.1507.SKS
M 16 x 1,5	1,5 - 6	19	27	10	178.1706.SKG	178.1706.SKS
	2,5 - 8				178.1708.SKG	178.1708.SKS
	2 - 7	22	29	10	178.1707.SKG	178.1707.SKS
	3,5 - 10				178.1710.SKG	178.1710.SKS
M 20 x 1,5	3 - 9	24	30	10	178.2009.SKG	178.2009.SKS
	5 - 12				178.2012.SKG	178.2012.SKS
	7 - 14	27	33	10	178.2014.SKG	178.2014.SKS
M 25 x 1,5	5 - 12	27	35	10	178.2512.SKG	178.2512.SKS
	7 - 14				178.2514.SKG	178.2514.SKS
	7 - 16	33	39	10	178.2516.SKG	178.2516.SKS
	9 - 18				178.2518.SKG	178.2518.SKS
M 32 x 1,5	11 - 21	42	42	10	178.3221.SKG	178.3221.SKS
	14 - 25				178.3225.SKG	178.3225.SKS
M 40 x 1,5	13 - 26	53	52	10	178.4026.SKG	178.4026.SKS
	18 - 32				178.4032.SKG	178.4032.SKS
M 50 x 1,5	17 - 31	60	55	12	178.5031.SKG	178.5031.SKS
	24 - 38,5				178.5038.SKG	178.5038.SKS
M 63 x 1,5	26 - 39	70	56	12	178.6339.SKG	178.6339.SKS
	35 - 48				178.6348.SKG	178.6348.SKS
langes Anschlussgewinde / long entry thread						
M 12 x 1,5	1,5 - 5	15	24	15	178.1505.SLG	178.1505.SLS
	2,5 - 6,5				178.1507.SLG	178.1507.SLS
M 16 x 1,5	1,5 - 6	19	27	15	178.1706.SLG	178.1706.SLS
	2,5 - 8				178.1708.SLG	178.1708.SLS
	2 - 7	22	29	15	178.1707.SLG	178.1707.SLS
	3,5 - 10				178.1710.SLG	178.1710.SLS
M 20 x 1,5	3 - 9	24	30	15	178.2009.SLG	178.2009.SLS
	5 - 12				178.2012.SLG	178.2012.SLS
	7 - 14	27	33	15	178.2014.SLG	178.2014.SLS
M 25 x 1,5	5 - 12	27	35	15	178.2512.SLG	178.2512.SLS
	7 - 14				178.2514.SLG	178.2514.SLS
	7 - 16	33	39	15	178.2516.SLG	178.2516.SLS
	9 - 18				178.2518.SLG	178.2518.SLS
M 32 x 1,5	11 - 21	42	42	15	178.3221.SLG	178.3221.SLS
	14 - 25				178.3225.SLG	178.3225.SLS
M 40 x 1,5	13 - 26	53	52	16	178.4026.SLG	178.4026.SLS
	18 - 32				178.4032.SLG	178.4032.SLS
M 50 x 1,5	17 - 31	60	55	16	178.5031.SLG	178.5031.SLS
	24 - 38,5				178.5038.SLG	178.5038.SLS
M 63 x 1,5	26 - 39	70	56	16	178.6339.SLG	178.6339.SLS
	35 - 48				178.6348.SLG	178.6348.SLS

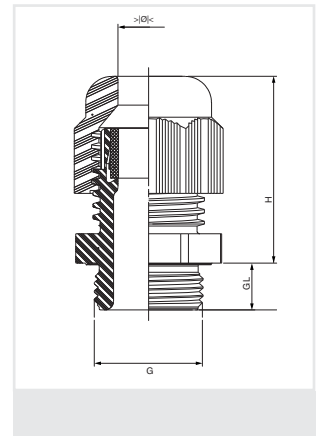

Auf Anfrage:
 in dunkelgrau (RAL 7001)

On request:
 in dark grey (RAL 7001)