

eColor Graze QLX Powercore

Zulassungen und Anwendungseigenschaften

Schutzart (IP)	IP66 [Schutz gegen Eindringen von Staub, strahlwassergeschützt]
Schlagfestigkeit (IK)	IK10 [IK10]
Vibrationsstandard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.


Initialkennwerte (IEC konform)

Systemleistung	20 W
-----------------------	------

Anwendungsparameter

Umgebungstemperaturbereich	-40 bis +50 °C
Produktdaten	
Gesamt-Produktcode	871829160817200
Bestell-Produktname	BCS447 9 RD 20W L1219
EAN/UPC - Produkt	8718291608172
Bestellcode	60817200
Anzahl pro Verpackung	1
Anzahl pro Umverpackung	1
Material-Nr. (12NC)	910503703625
Nettogewicht (Einzelteil)	4,700 kg

Abmessungsskizzen

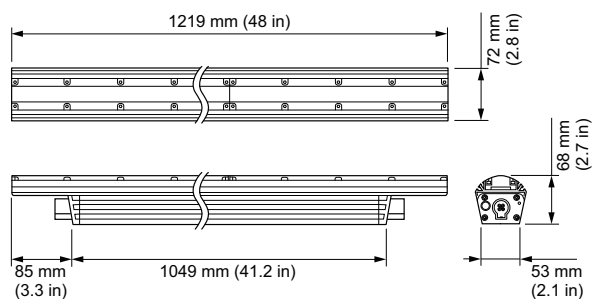

Graze

