

INSTRUCTION

32-2016






Basic Ball

312114.002

IP 40 IK10
 220 - 240 V / 0 Hz, 50 - 60 Hz

 3 x 2,5 mm²
 2,50 mm²

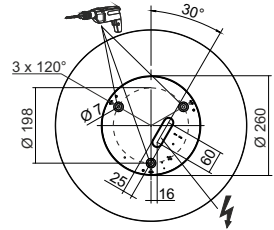

312114.002	D 630, H 630	LED	79 W	10,4 kg
Φ	EEK _{LED}	EEK	CRI	CCT
8100 lm	A+	A+	85	3000K
B10	B16	C10	C16	
9	15	15	25	20 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464











EN 12464

Wartungsplan/
Maintenance
schedule



RZB
Rudolf Zimmermann,
Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de

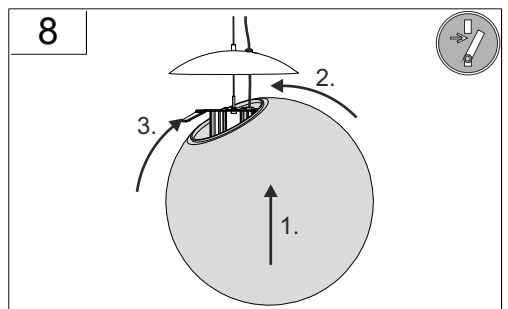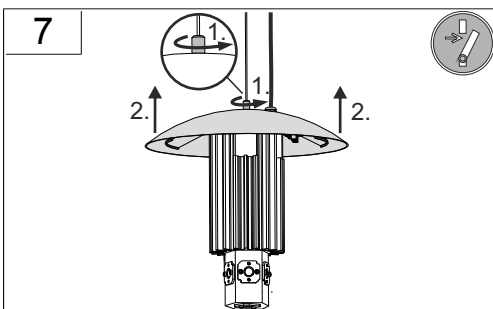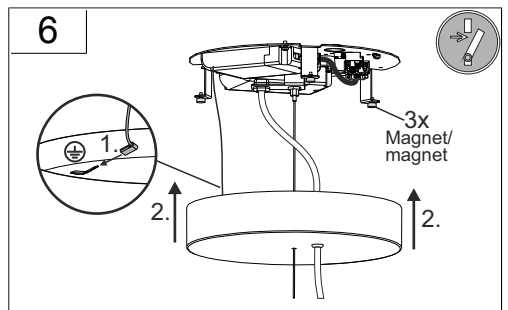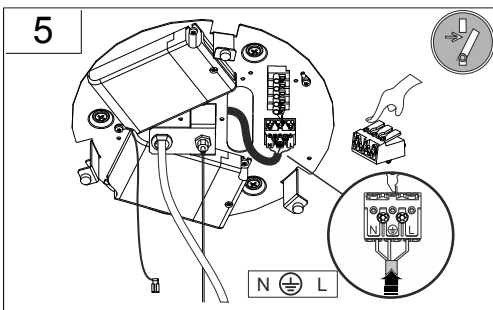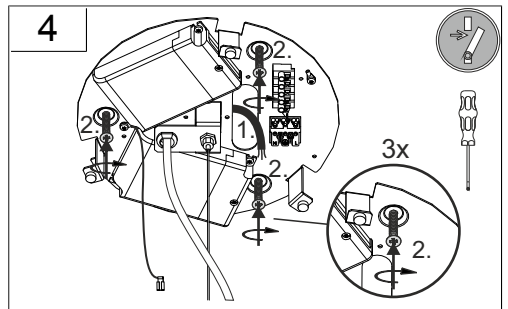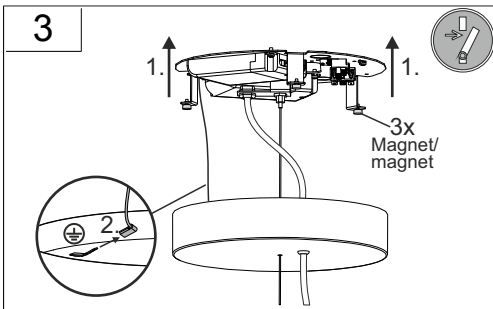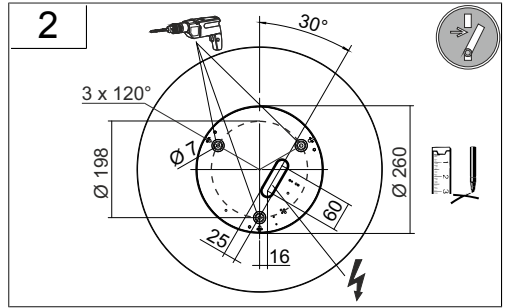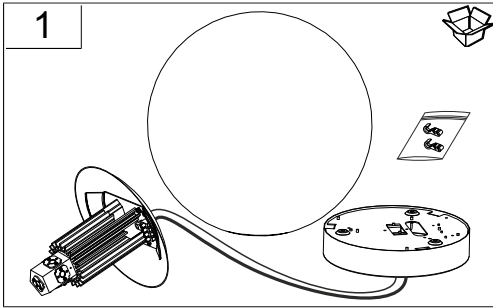





+



9

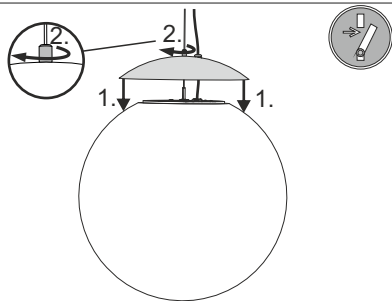

10

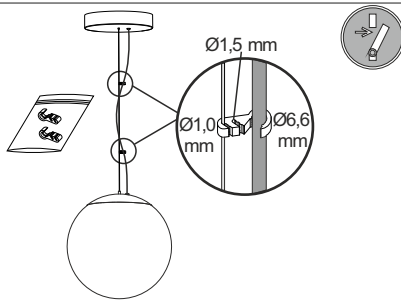

11





08-311378.012 Ersatzdiffusor PE-ND D 630

5 kg